



UA300 adopts the brand new firmware and provides an unprecedented user experience. It brings innumerable surprises, including the stunning GUI, rock-solid stability, fast matching speed and expandability.

Users can easily manage data by networking UA300 via RS232/485, TCP/IP, USB Host or USB Client. Most importantly, all the functions can still operate in a networking state. UA300 is compatibility with various types of USB flash disks, ADMS and former SDK. It also supports data backup and retrieve to avoid the risk of accidental deletion.

It promotes the fingerprint time & attendance management to the next level. You can get the best of benefits from the UA300.













Features

Remarkable user experience

- * Intuitive and stunning UI designed with the most popular and internationalized factor.
- * Interface operation adopts modularized hierarchical design. Simpler, Better and More logical.
- * Faster matching speed: less than 0.5 second.

Enhanced features and performance

- * Support user validity settings.
- * Support data backup and retrieve.
- * Support advanced Workcode consisted of letters and numbers.
- * Support chip encryption for firmware protection.
- * Support more flexible menu configuration: double line text display.
- * Support external printer for attendance records output (Optional).


Excellent expandability

* Easy to extend functions and customize customers' demand.


Specifications

| Fingerprint Capacity | 3000 (1:N) |
|----------------------|---|
| ID Card Capacity | 10,000 (Optional) |
| Record Capacity | 100,000 |
| Display | 3-inch Screen |
| Communication | TCP/IP, RS232/485, USB (host & client) |
| Standard Functions | Web Server, Short Message, Automatic Status Switch, Self-Service Query, |
| | Work Code, T9 input, 9 Digits User ID, DST, Schedule Bell |
| Optional Functions | ID/Mifare Card, External Printer |
| Software | ZKTime 5.0 (Free), ZKTime. Net 2.0 |
| Power Supply | DC 5V 2A |
| Verification Speed | ≤0.5 sec |
| Operating Temp. | 0℃-45℃ |
| Operating Humidity | 20%-80% |
| Dimension | 180*135*37 mm (Length*Width*Thickness) |
| Net Weight | 0.70 kg |


Dimensions (mm)



Interface



Configuration

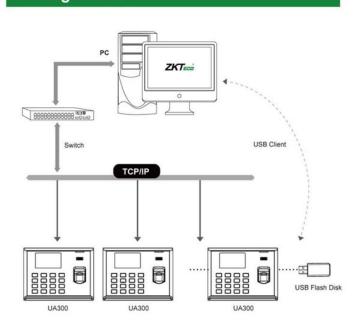

Package List

















UA300

Back Plate

Screws and Holders

Software CD (ZKTime 5.0)

Star-shape Screw Driver

Power Adapter

USB Cable

Mounting Paper



ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town, Longgang District, Shenzhen China 518129 Tel:86-755-8960 2345/46/47/48 Fax:86-755-8960 2675 www.zkteco.com

Global Offices:

USA: + 1 732-412-6007 EU: +34 916532891 Brazil: +55 31 2515-8326 Thailand: +66-027199154 Mexico: +52-55-52078969

South Africa: +27 12 259 1047 Egypt: +202-24055541 Dubai: +971 4 6091 310 India: +91 8123536788 Indonesia: +62 21 2921 8949 Vietnam: +84-0169-5813007



